

**Standard Features:**

- Louvers run parallel to the 1st dimension specified
- 1/2" spacing louvers at 30° pitch
- Stamped from cold roll steel
- Install with louvers in up or down position for best duct concealment
- Countersunk mounting holes with color matching Phillips Pozidriv screws
- Rust resistant pre-coat with durable powder finish
- Soft White

**Finishes:**


STANDARD COLORS

- Soft White
- Driftwood Tan


DESIGNER COLORS

- Black
- Bronze
- Storm Gray
- Cement Gray

- Coffee Tan
- Warm White
- Glossy White

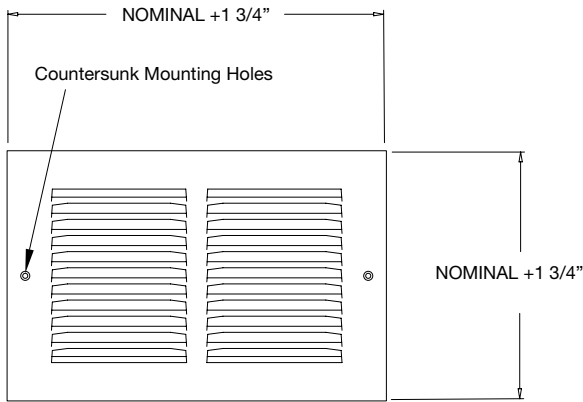

1050V

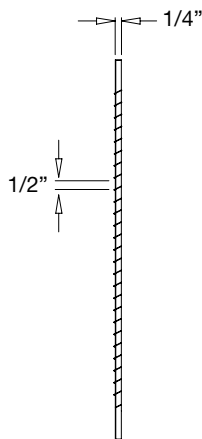

1050V Sideview

**Sizes Available**

12 x 6	12 x 12	14 x 8	14 x 14
12 x 8	14 x 6	14 x 10	

**Additional Information:**

**Submittal Notes**

Project / Location:	
Engineer:	
Architect:	
Contractor:	