
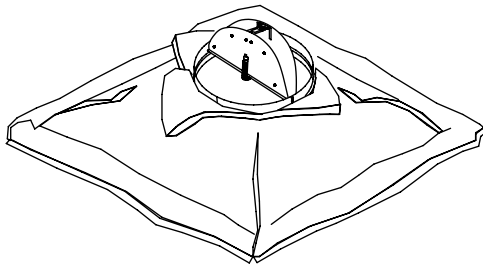
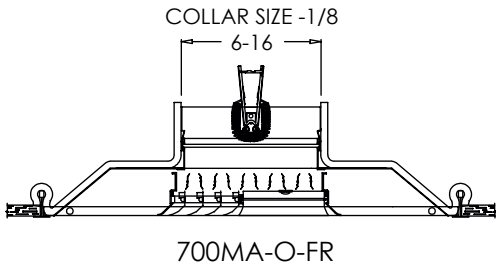
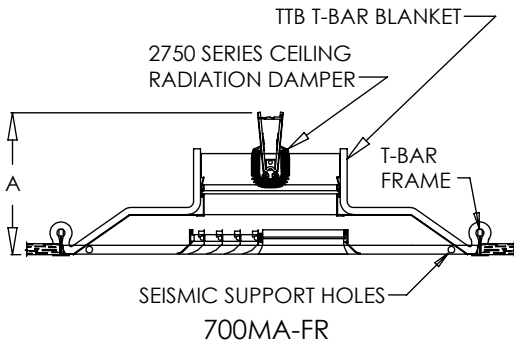


# Fire Rated Submittal

U.L. Fire Resistance Classified T-Bar Modular Core Diffuser  
 MODEL: 700MA-FR Series

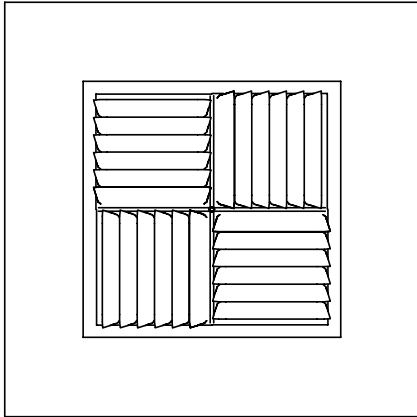

### Standard Features:

- T-Bar FR assembly includes 2750 Series Ceiling Radiation Damper and TTB Series Thermal Blanket
- UL listed fire resistance T-Bar
- 3 hour fire resistance rating
- Building materials rated 3 hours or less
- 2X2 panel
- Adjustable modular cores with fixed curved blades
- Maintains horizontal airflow pattern
- 2" ADC compliant round collar with bead for ease of installation
- Standard collar diameter is the same as the diffuser size
- Diffuser available in sizes 6"x6" through 16"x16"
- Collar sizes available in 6", 7", 8", 9", 10", 12", 14", & 16"
- Rust resistant pre-coat with durable powder finish
- Soft White

### Options:

Recessed screwdriver operated Opposed Blade Damper (700MA-0-FR)

### Finishes:

#### STANDARD COLORS

- Soft White
- Driftwood Tan

#### DESIGNER COLORS

- Black
- Bronze
- Storm Gray
- Cement Gray
- Aluminum Paint
- Coffee Tan
- Warm White
- Glossy White

Maximum Product Height	
DAMPER SIZE	HEIGHT (A)
6"	6 1/2"
7"	7"
8"	7 1/2"
9"	8"
10"	8 1/2"
12"	9 1/2"
14"	10 1/2"
16"	11 1/2"



### Additional Information:

### Submittal Notes

Project / Location:	
Engineer:	
Architect:	
Contractor:	