


916

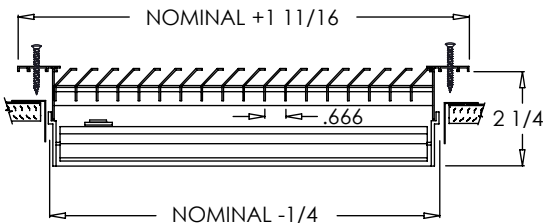

916-O

**Standard Features:**

- Extruded aluminum surface mount frame with signature line marks
- Extruded aluminum fixed bar blades at 45°
- Blades are parallel to shortest dimension
- Designed to minimize vision into air duct
- Center margins are mounted on the backside of the grille for a streamlined continuous look
- Countersunk mounting holes with color matching Phillips Posidriv screws
- Rust resistant pre-coat with durable powder finish
- Soft White

**Options:**

- Recessed screwdriver operated Opposed Blade Damper (916-0)
- Heavy duty
- MRI Compatible
- Insect Screen
- Fractional sizes
- Exact I.D. and O.D. sizes (available in 1/2" increments only)
- Square to round 2" collar with roll formed retention bead – available in square sizes only
- T-20 Tamper Proof Screws

**Finishes:**

STANDARD COLORS

- Soft White
- Driftwood Tan
- Mill Finish

DESIGNER COLORS

- Black
- Bronze
- Storm Gray
- Cement Gray

- Aluminum Paint
- Coffee Tan
- Warm White
- Glossy White

**Additional Information:**

Submittal Notes

|                     |  |
|---------------------|--|
| Project / Location: |  |
| Engineer:           |  |
| Architect:          |  |
| Contractor:         |  |